Pressure gauge

Dial pressure gauges for pumps, filters and RO skids.

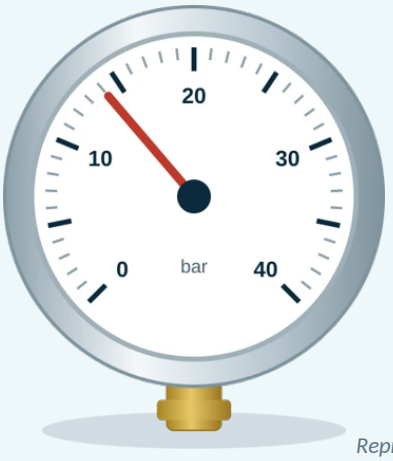

Representative illustration. Actual product may differ.

Overview

Pressure gauges show the pressure before and after filters, pumps and membranes. Rising difference between two gauges tells you when a filter or cartridge needs cleaning. We supply dry and glycerine-filled versions in several ranges.

Key features

- Dry and glycerine-filled versions
- Stainless steel case
- Ranges from low to high pressure
- Bottom and back connections
- Easy to read dial

Typical applications

- RO skids
- Filter inlet and outlet
- Pump discharge
- Cartridge filter housings

Typical specifications

Dial size	63 mm and 100 mm
Range	About 0 to 4 bar up to 0 to 60 bar
Case	Stainless steel
Fill	Dry or glycerine-filled
Connection	1/4 in or 1/2 in, bottom or back

Values are typical, for reference. The final specification is confirmed in our quotation, against your flow, pressure and water analysis.

Request a quote

Birgunj-11, Madesh Province, Nepal. Contact offices: Butwal, Biratnagar.
+977-9802059080 | +977-9855035809 | customercare@nepalionexchange.com.np
nepalionexchange.com.np/products/pressure-gauge.html